


Rain RFID Sucker Tag



Application:

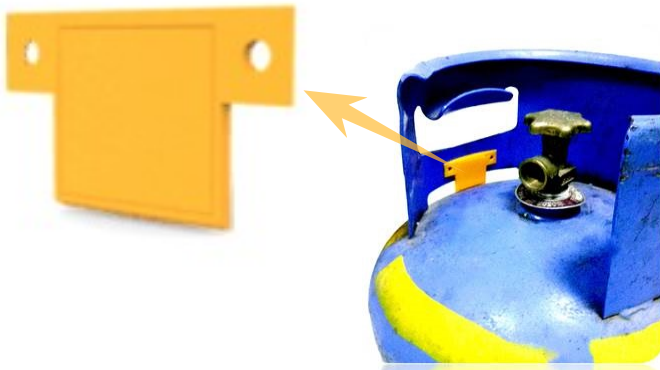


- Tool and Rental Equipment Tracking
- Energy Industry
- Containers & Yard Management
- Industrial Equipment

Key Features:

- Transform metallic interference
- Omnidirectional reading performance
- Up to 4M read distance
- Wonderful temperature resistance
- High adaptability with reasonable cost
- Suit for industrial equipment, and size can be customized

Tag Spec.:

Material	Special Plastic Housing (thermostability 180°C/3hours)
Protocol:	ISO18000-63, EPC C1 Gen2
Frequency:	865-868MHz (ETSI), 902-928MHz (FCC)
Chip:	H3, H4, M4, M5, MR6, MR6-P etc.

			
Size:	39*64*4.9mm	64*57*10.3mm	38*57*10.3mm
Height:	39mm±0.2mm	57mm±0.2mm	55mm±0.2mm
Width:	64mm±0.2mm	64mm±0.2mm	38mm±0.2mm
Thickness:	4.9mm±0.2mm	4.9mm±0.2mm	4.9mm±0.2mm
Fixed method:	Rivet and screw	Rivet and screw,Arc+glue fixed	Arc+glue fixed
Sealed:	IP67	IP67	IP67
Printing:	Ink Jet/ Laser printing	Ink Jet/ Laser printing	Ink Jet/ Laser printing
Barcode:	1D/2D	1D/2D	1D/2D
Color:	Yellow or customization	Yellow or customization	Yellow or customization
N.W:	40g	60g	45g



SHANGHAI HUAYUAN ELECTRONIC CO., LTD

info@HUAYUANsh.com
 Add:517, B Bid, No 399 Hengnan Rd, Shanghai 201112, China, T:+86 21 5424 6151 ;F: +86 21 5424 6163
 Copyright 2019 HUAYUAN reserves the right to make changes to this document and its products at any time without notice.
 The information in this product data sheet is intended to be general descriptive information for potential customers and users. HUAYUAN does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of HUAYUAN products including liability or warranties merchantability, or infringement of any intellectual property rights.