

H0895MR6/PA

UHF RFID Inlay



Specification

Physical Characteristics

| | |
|----------------------|----------------|
| Antenna Dimension | 8 x 95 mm |
| Inlay /Tag Dimension | 11 x 98 mm |
| Antenna Pitch | 15.875 ± 0.500 |
| PET Width | 105.00 ± 1.00 |

Electronic Characteristics

| | |
|-------------------------|---|
| Protocol | EPC Class 1 Gen 2/ISO 18000-6C |
| Manufacture / IC | IMPINJ Monza R6 / IMPINJ Monza R6-P |
| EPC / TID / User Memory | 96bits/96bits/0bits 128bits/96bits/32bits |
| Base Material | PET |
| Face Stock | N/A |
| Antenna | Etched Aluminum (10μm)+ PET (50μm) |
| Operating Frequency | FCC, ETSI |
| Operating Mode | Passive |
| ESD Voltage Immunity | Max.2000V Human being mode(HBM) |

Environment & Package


| | |
|-----------------------|-------------------------------|
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -40°C to +85°C |
| Static Pressure | <10 MPa |
| Package | 5000 pcs/roll, 4 rolls/carton |

Delivery Formats

| | |
|---------------------|--|
| Available Formats | Dry Inlay, Wet Inlay, RFID Tag |
| Quality | 100% tested with out-of-tolerance inlay marked |
| Inner Core Diameter | 76 mm/3 inch |

Package Info.:

ESD package box 5,000pcs/roll, 4 or 8 rolls/ctn. Packing in roll for printing and cutting at customer

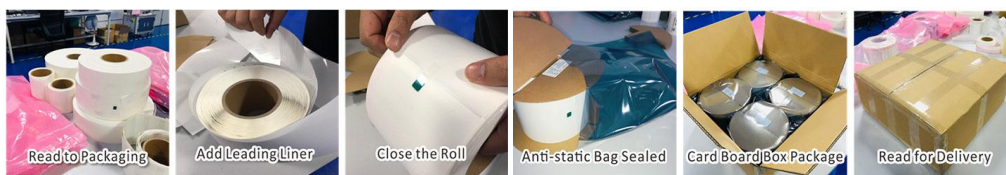

The information contained on this Document is considered to be confidential material proprietary to HUAYUAN, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to HUAYUAN.----- 1 / 1

