H3050U7A

UHF RFID Inlay

Specification

Physical Characteristics	
Antenna Dimension	30 x 50 mm
Inlay /Tag Dimension	33 x 53 mm
Antenna Pitch	38.10 ± 0.500
PET Width	65.00 ± 1.00
Electronic Characteristics	
Protocol	EPC Class 1 Gen 2/ISO 18000-6C
Manufacture / IC	NXP UCODE 7
EPC / TID / User Memory	128bits/96bits/0bits
Base Material	PET
Face Stock	N/A
Antenna	Etched Aluminum (10μm)+ PET (50μm)
Operating Frequency	FCC, ETSI
Operating Mode	Passive
ESD Voltage Immunity	Max.2000V Human being mode(HBM)
Environment & Package	
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Static Pressure	<10 MPa
Package	5000 pcs/roll, 4 rolls/carton
Delivery Formats	
Available Formats	Dry Inlay, Wet Inlay, RFID Tag
Quality	100% tested with out-of-tolerance inlay marked
Inner Core Diameter	76 mm/3 inch

Package Info.:

ESD package box 5,000pcs/roll, 4 or 8 rolls/ctn. Packing in roll for printing and cutting at customer

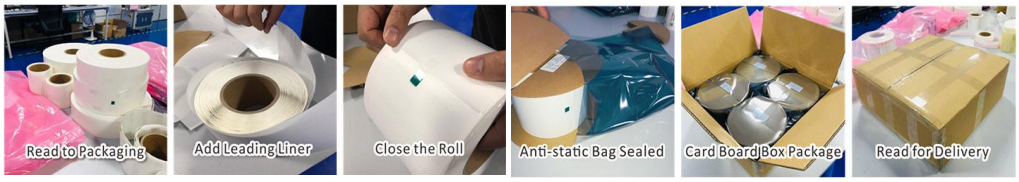

*The information contained on this Document is considered to be confidential material proprietary to HUAYUAN, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to HUAYUAN.----- **1 / 1***