

HND20I

# HF RFID Inlay



## Specification

Antenna Dimension	Φ 20 mm
Inlay/Tag Dimension	Φ 23 mm
Chip	NXP ICODE SLI, ICODE SLIX, ICODE SLIX2
Frequency	13.56MHz
Memory	1024 bits, 1024 bits, 2560 bits
Base Material	PET
Protocol	ISO15693
Life time	10 years
Operating Mode	Passive
Read Ranger	Up to 1.5m

## Environment & Package


Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Package	5000 pcs/roll, 4 rolls/carton

## Delivery Formats

Available Formats	Dry Inlay, Wet Inlay, RFID Tag
Quality	100% tested with out-of-tolerance inlay marked
Inner Core Diameter	76 mm/3 inch

## Package Info.:

ESD package box 5,000pcs/roll, 4 or 8 rolls/ctn. Packing in roll for printing and cutting at customer

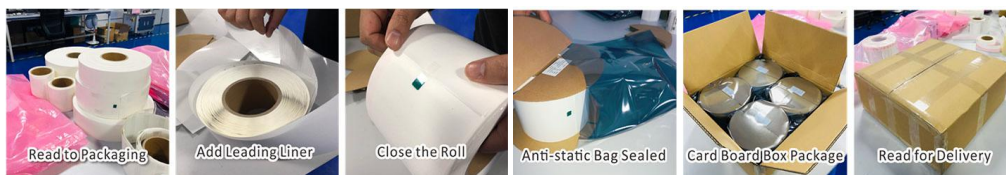

The information contained on this Document is considered to be confidential material proprietary to HUAYUAN, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to HUAYUAN.----- 1 / 1

