

PVC RFID Disc Tag




Feature

- Strong lamination housing
- Easily integrated to your workpiece/ product for a variety of industrial and Item Identification logistical
- Different dimensions allow for optimum ratio of size / reading performance
- Optional with Ferrite Layer to mount on metal
- RoHS green product

Application

- Security Process Control
- Asset tracking
- Device embedded
- Identification
- Inventory management

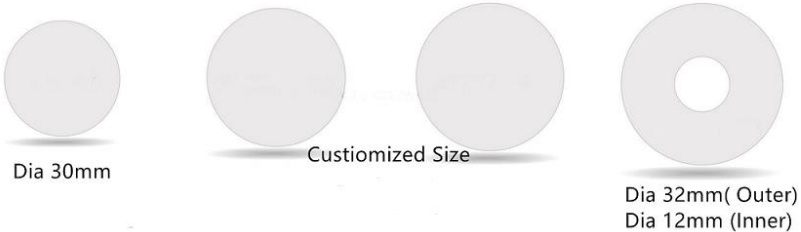

Specification


Frequency Range:	125kHz / 13.56MHz / 860~960MHz
Dimension:	LF: 15/18/20/25/30/32/35/40/50mm HF: 13/15/18/20/25/30/32/35/40/50mm UHF: 20/25/30/32/35/40/50mm
Thickness	1.0 ~ 1.2mm or customized size
Material:	PVC, PET
Resistance:	Indoor environment wafer, Dust proof
IP Class	IP65
Operating Temperature:	-25 ~ 60°C
Storage Temperature:	-40 ~ 70°C
Additional Craft for Optional	
Coding:	Chip encoding
Custom Logo:	Silk-screen printing, Laser engrave
ID Number Printing:	DOD printing, Laser engrave
On Metal:	Anti-metal layer optional, Thickness from 0.3-0.5mm
Adhesive:	Ordinary adhesive sticker, 3M adhesive layer optional



Custom Printing



Laser Engrave



Anti-metal Layer



3M Self-adhesive



With Epoxy



Transparent