

RFID Windshield Tag

Feature



- *Withstands toughest conditions:* Stand up to a big range of temperature, high humidity and condensates, UV-resistant, chemical resistant, outdoor applications.
- *Anti-tamper security:* The product is non-transferable and cannot be removed without being destroyed.
- *Perfect RFID performance:* Up to 9m [30ft] reading range.
- *Full customization:* Surface printing, variable data process etc.

Application

- Vehicle registration
- Tolling management
- Fleet management
- Access control identification

Specification

Frequency:	13.56MHz / 860~960MHz
Dimension:	50*50mm / 102*35mm, 110*45mm
Thickness:	0.3mm~0.5mm(Release paper layer not include)
Reading Range	3~10cm(HF); 6~9meter(UHF)
Material:	Paper, PET layer with technique prohibit migration
Image:	Second surface - Printed on underside
Data:	Variable data process
Adhesive:	Pressure-sensitive adhesive
Operating / Storage Temp.:	-30 ~ 75°C

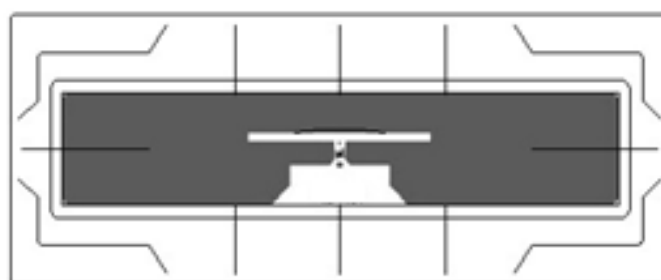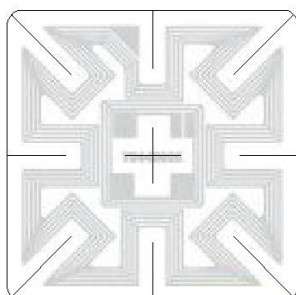

Installation instructions

- Adhesive of the label will provide best adhesion in 24 hours after the installation.
- Always clean and dry the surface for obtaining the maximum bond strength.
- Avoid touching the background adhesive.
- Label antenna parts should not be in contact with metal to enable best performance.
- Note that metallized UV-protective films have strong effect on RFID performance.